


GRAINFILLER, SANDING SEALER & BASE PRIME COAT ALL IN ONE APPLICATION!

"Do It Once, Do It Well - Let He Who Buys Compare!"

TIMBERMATE®

MADE IN AUSTRALIA

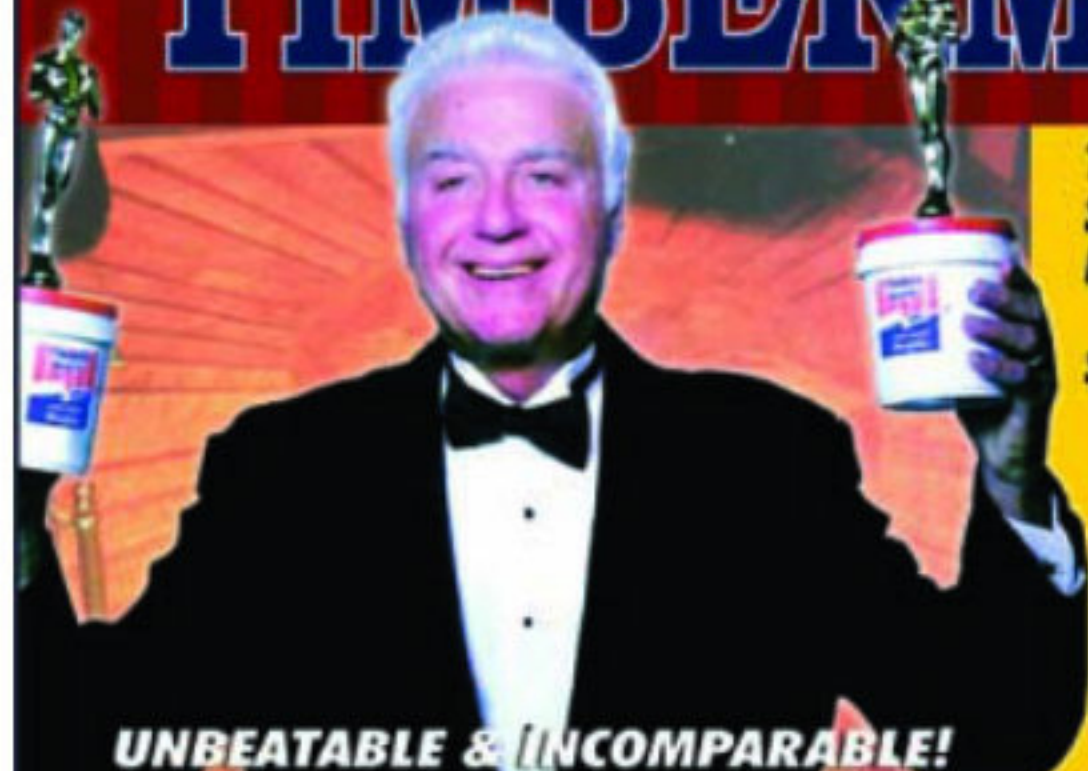

TIMBERMATE WINS BEST SUPPORTING WOOD FILLER AWARD IN USA FOR SEVERAL YEARS IN A ROW!



Why settle for runner-ups and also-rans when you can work with a star?

Everyday more and more professional wood-flooring craftsmen and manufacturers are switching to TIMBERMATE wood filler from brands they've worked with for years—brands that frequently delivered just so-so results.

Awarded Best Filler by:



National Wood Flooring Association USA

**ECO-FRIENDLY
100% NATURAL & ORGANIC
It's WATER-BASED!**

with TAP WATER as one of the secret ingredients



BRUMMER P3 - INTERIOR GRADE

UNBEATABLE & INCOMPARABLE!

**4R's = REDUCE · REPLACE
RE-USE · RECYCLE**

"Will Not Crack, Shrink, Sink or Fallout"

It's 5-in 1!

**Wood Putty · Grain Filler · Edge Filler
Sanding Sealer · Hole, Knot & Crack Filler**

UNIQUE FEATURES:

- Indefinite pot and shelf life • Non-flammable • Non-yellowing • Non-acrylic, Non-latex • Non-solvent • Heat & freeze proof • Stainable before or after application • Usable up to the last drop • Contains no acetone, toxic, or any harmful ingredients • No Volatile Organic Compound (VOC) • Free of Lead (Pb), Mercury (Hg) and Poly Chlorinated Biphenyl Compounds (PCB's) • TIMBERMATE is a heavy-bodied filler, twice the density of other fillers • Friendly to apply on children's toys and furniture • Tools and hands clean up with water

"TIMBERMATE - Interior Grade"

"Will Not Crack, Shrink, Sink or Fallout"

"Do It Once, Do It Well - Let He Who Buys Compare!"



**WINNER
BIRGER AND JUELL LTD.**

Birger and Juell Ltd. used TIMBERMATE exclusively in their award-winning floor.

STORING TIMBERMATE

INDEFINITE SHELF AND POT LIFE. Therefore no waste, allow putty to dry out if previously thinned. DO NOT add water before closing container or leave excess water in pail for a long period of time, e.g. 3-7 days, the trapped excess water will cause the putty to become contaminated.

JELLY & LUMPS. When you see brown jelly or some color mixture in TIMBERMATE during hot weather, no need to worry. The hot weather causes it. However, it does not affect TIMBERMATE's quality. There are times when the water and powder mixes, looking like lumps during hot and cold weather. These lumps spread out when you start using the putty. Upon using, mix it like dough with little water. Afterwards, you are now ready to use TIMBERMATE and rest assured, it will always be on its top quality.

CLEANING TIMBERMATE

You only need water to clean up your hands, applicators and tools after application. Do not use thinner or solvents. TIMBERMATE is safe and does not emit toxic fumes because TIMBERMATE does not contain solvents.

ALL STAINS, SEALERS AND TOP COATINGS ARE COMPATIBLE WITH TIMBERMATE

UNIQUE FEATURES

- TIMBERMATE is manufactured as a unique, water-based, non-acrylic, formula proven in Europe, for over 60 years.
- TIMBERMATE is completely compatible with all known top coatings, acid catalyst, acrylics, vinyl, P.U., P.E., Nitro-Cellulose Lacquers.
- TIMBERMATE will take water-based stains, solvent stains, oil base stains, French Polish, Wax Polish, Lin Seed and Various oils.
- Fills cracks in all types of timber boards, masonry, plaster, flooring, dry wall, brick, concrete, fiberglass, plastic, metal etc. It can be mixed with wood glue being water based and non-acrylic.
- TIMBERMATE can handle screwing, planing, cutting, drilling, sawing, and routing. When re-screwing, a pilot hole is recommended before proceeding. Can be used for all types of interior work.
- TIMBERMATE may be hard some days and feel dry and soft on other days. Don't be alarmed as;
- TIMBERMATE is temperature sensitive, the warmer the weather or environment the softer the putty. On cooler days it will start to dry in the tub. Add some grams of hot water to remoisten / reconstitute or submerge the pail in a tub of hot water to soften.
- TIMBERMATE is ideal for do-it yourself, manufacturers, hardware store, architects, carpenters, painters, interior designers, refinisher and more. It is GREAT for cabinets, furniture, wood veneer or solid wood floors, doors, frames, paneling, windows, metal furniture, fiberglass, MDF, particle boards, plaster boards, cement boards, plywood and it can also be used to restore antiques, stone craft, cast iron and components.
- It's heat proof up to 220°C and freeze proof up to -70°C, will not crack, sink, or fallout.

MDF-PARTICLE BOARD & PLYWOOD APPLICATION

Due to the finishing system used to manufacturing these boards, it is essential to seal the surface with water-based, non-acrylic product before applying coatings.

FOR MDF GRAINFILLER: Mix 700ml water to 1Kg TIMBERMATE. You can apply with gravity-type spray gun with 2mm nozzle. Can also apply using cloth. Apply thin coat only. Coverage: 12-15 sqm per kilo.

FOR PARTICLE BOARD: Mix 400-500ml water to 1Kg TIMBERMATE. It is more effective to apply with cloth, since particle board is more porous than MDF. Apply thin coat only. Coverage: 12-15 sqm per kilo.

TIMBERMATE grainfiller & edgefiller doesn't swell the boards because there is no solvent, acrylic or latex content. In fact, it reduces your finishing coatings consumption by about 30%. This is among the reasons why TIMBERMATE meets your needs best!